

Guidelines for NX32's Upgrade to latest version 1.233

Step 1

This window shows the current version which is used in NX 32 device

Version 1.231

IP CONFIGURATION FIREWALL SIP CONNECT 3CX WARRANTY CONTACT US

Obtain an IP address automatically

Use the following IP address

LAN
Update IP Details

Address	192	168	101	1
Netmask	255	255	255	0
Gateway	192	168	101	1

Update Lan

Step 2

Click on the menu button below the current version 1.231 or Below, and select **UPDATE** option.

call4tel 3CX

Version 1.231

IP CONFIGURATION FIREWALL SIP CONNECT 3CX WARRANTY CONTACT US

Obtain an IP address automatically

Use the following IP address

LAN
Update IP Details

Address	192	168	101	1
Netmask	255	255	255	0
Gateway	192	168	101	1


Update Lan

PROFILE
UPDATE
LOGOUT

Obtain an IP address automatically

Step 3


A window with **NEW UPDATE FOUND** follows. Select the encircled button to update to the next Available version.

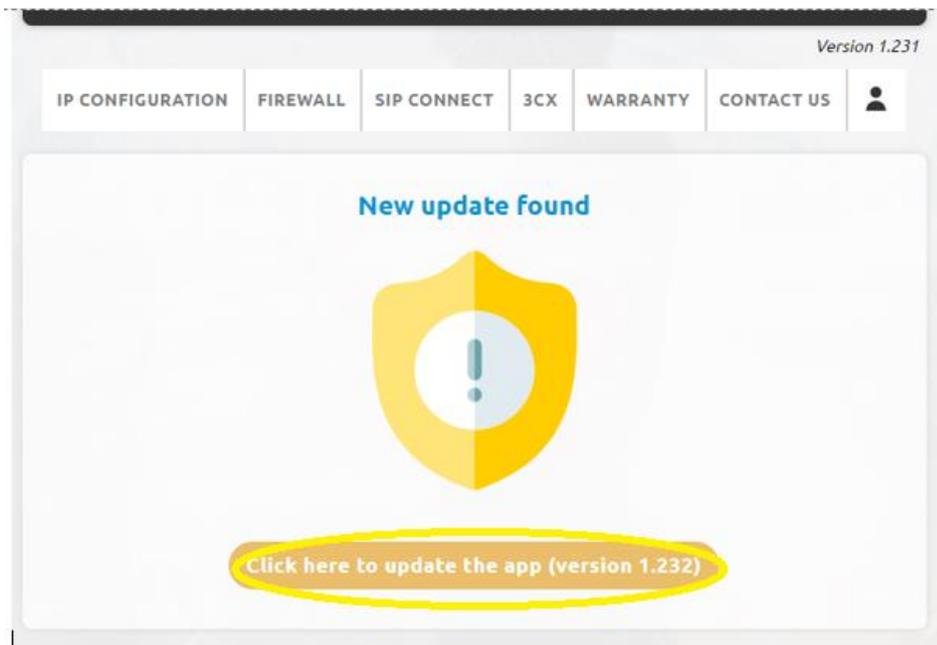

Step 4

This window indicates that the device has been **successfully updated**.

Click on continue button subsequently.




Step 5

Click on the Refresh button so that the page gets refreshed.

Please note that the version has been **updated**.


Step 6

Click on the menu button again below the current version, and select **UPDATE** option.

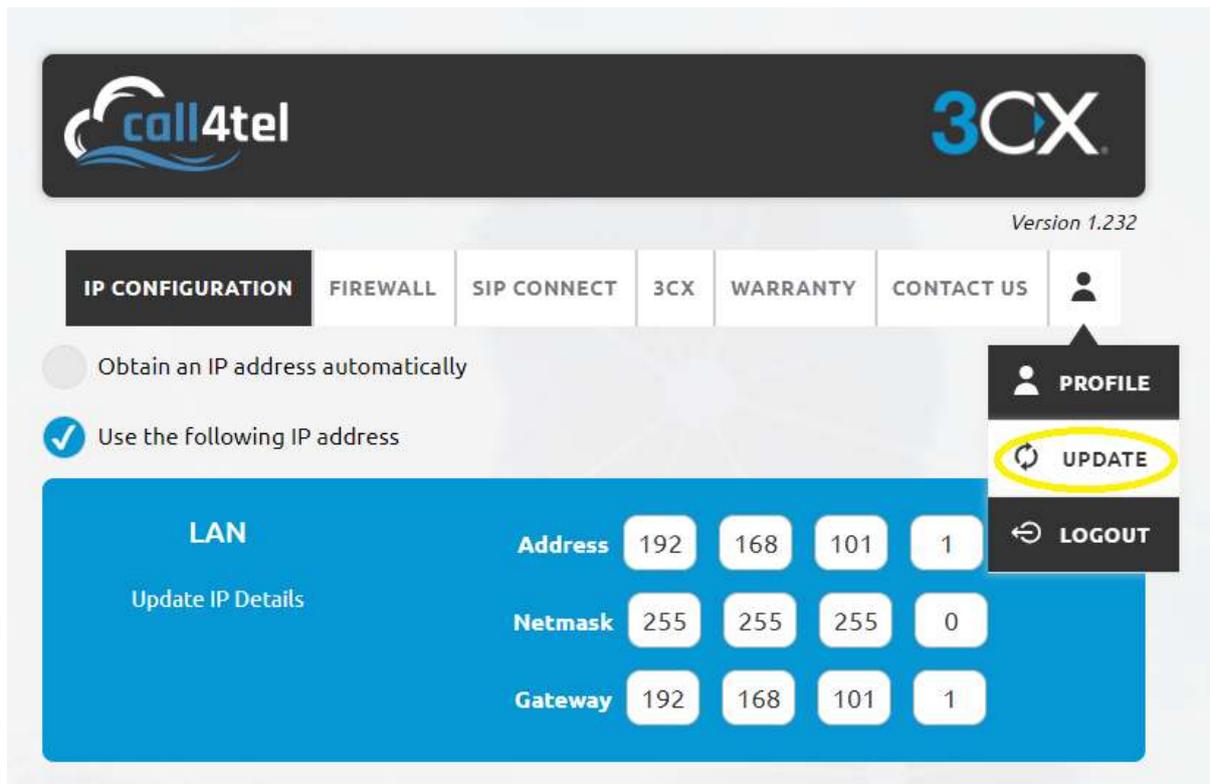

Step 7

A window with “**NEW UPDATE FOUND**” follows. Select the encircled button to update to the next version 1.233.

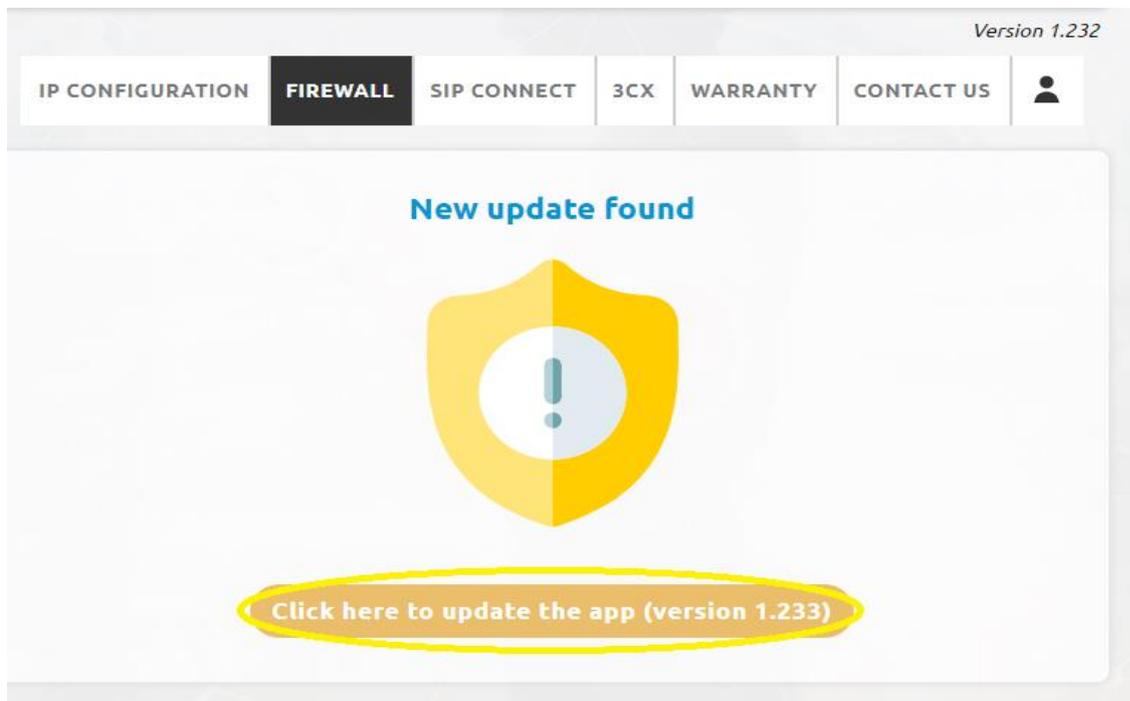


Step 8

Please wait for a few minutes to get the updated version.

Refresh the page subsequently.

Once the device is up to date, a page with NO UPDATE FOUND, “**YOUR DEVICE IS UP TO DATE**” will follow. No you can see SBC Switch option under setting button

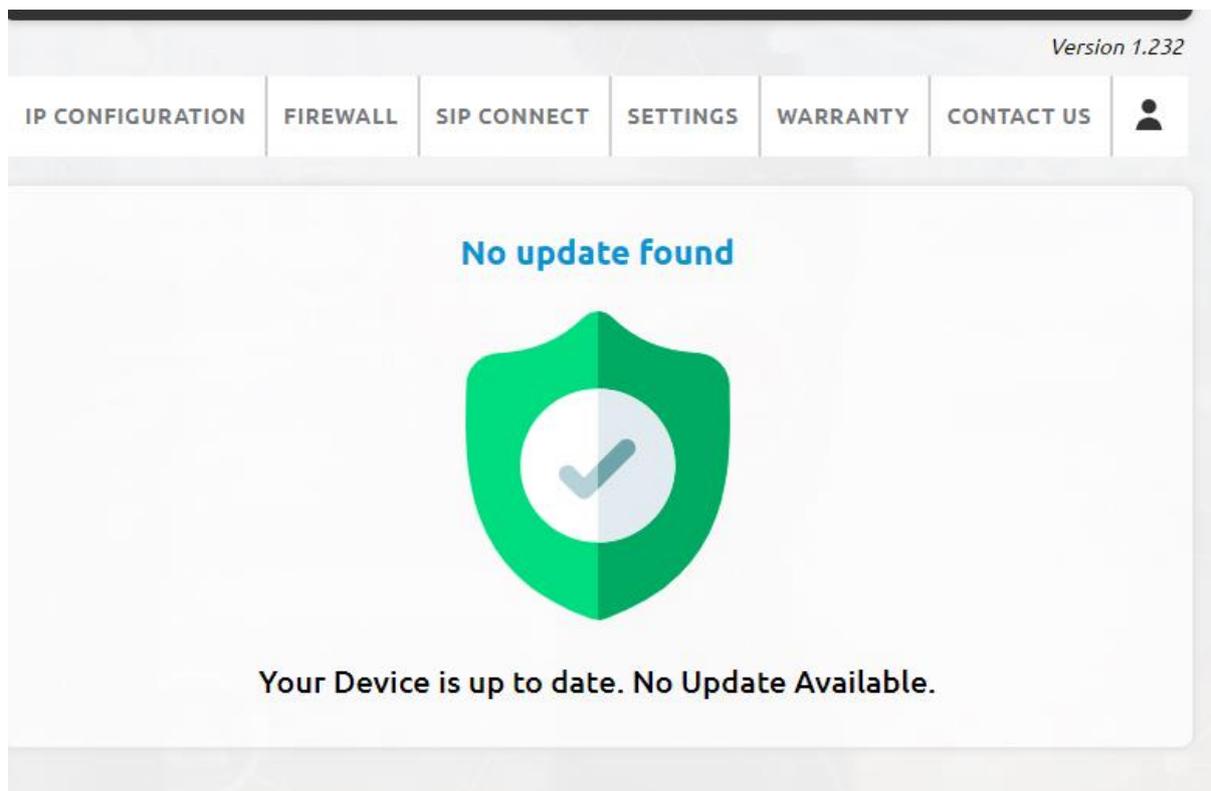

Thank you